

FITTING INSTRUCTIONS

Suits: Mitsubishi Magna F30, F40 Series

5461A Bush x 2

Retaining Clip x 2

Mounting Pin x 2

Washers x 4


Grease Satchel x 1

N.B: These instructions should be used in conjunction with workshop manual.

1. Raise the front of the vehicle, support on chassis stands and remove the wheels.
2. Remove the front, lower, rear control arm from vehicle.
3. Using a suitable press and tools, remove the old bush from control arm.
4. Inspect the control arm for damaged, bent, pitted or worn components and replace as necessary.
5. Install the new replacement bushes making sure the washers and retaining clip are fitted, in relation to underside of vehicle, as per Diagram below.

NB: The mounting bolt secures the retaining clip in place when re-fitted to vehicle.

6. Re-fit control arm to vehicle.
7. We recommend a wheel alignment be carried out after fitment.

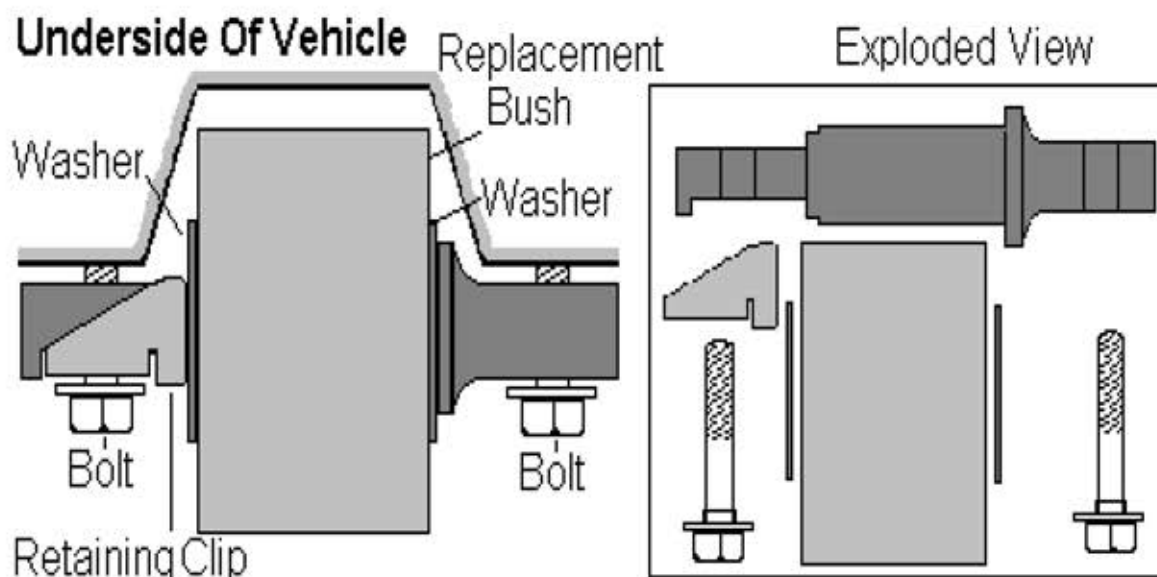

Note: It is recommended that a licenced workshop or trades person carry out the above procedure and that the workshop manual and relevant safety procedures are followed in addition to the above.