

Instructions

Steering Rack Bushings

N.B: This instruction sheet should be used in conjunction with the workshop manual and proper safety procedures followed.

Application - Honda Civic
- 2006-2011

Always refer complete catalogue listing

Install Guide


Contents - Bushing 91450 x4
- Bushing 91452 x1
- Steel tube 16x10x35 x2
- Grease

- Raise front of vehicle evenly and safely support

Never rely on a Jack only.

**Note - the original bushings can be replaced while Rack is still in vehicle.
The original bushings are rubber only (no steel outer shell).**

- Proceed to un-bolt and remove the 6 mounting bolts. It may be easier to remove Tie Rods also.
- Using threaded rod, nuts and sockets, create a mechanical 'puller' to 'pull' original rubber bushings out of aluminium housing.
- Clean housing. Push supplied bushings 91450 into housing. Grease is supplied to help with install - only use small amount of grease.
- Push in supplied steel tubes.
- Remove passenger side large bushing and replace with bushing 91452 - this bushing will be split for easy install.

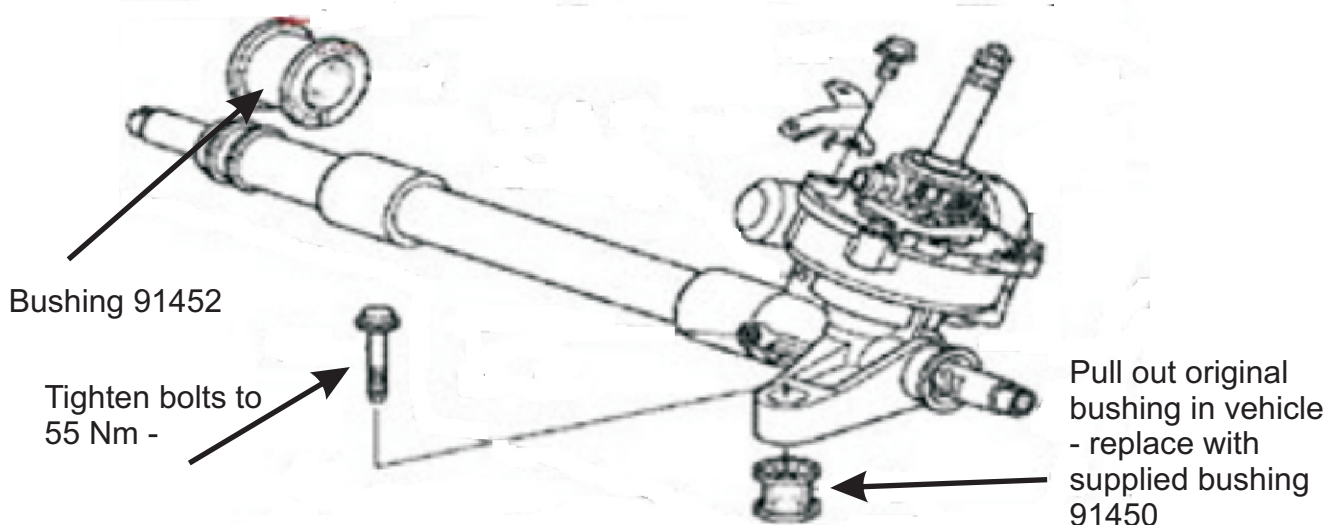

N.B: It is recommended that a licenced workshop or tradesperson carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.